

Product Description


HALNy GPON Gateway are innovative and powerful product for business and residential subscribers.

All products within the GPON family comply with current ITU-T standards for gigabit passive optical networks (GPONs). The solution is designed to optimize the deployment and roll-out of the service provider. HL-4G2 design offers multi-interoperability with several OLT vendors. The ONT/ONU products are tested and have proven interoperability with most major GPON OLT Vendors.

HALNy HL-4G2 provides one GPON port (SC/APC type) and four Gigabit Ethernet ports. ONT supports HGU (Home Gateway Unit – L3 / Router / NAT) and SFU mode (Single Family Unit) – bridge with advanced VLAN operation via OMCI.

HALNy specializes in cost-effective designs and works closely with service providers to improve their business case through a comprehensive range of standard products, supporting the industry's common demands. HALNy also provides custom designs and services to meet unique customer needs.

Housing can be sold with the Operator logo on the top cover.

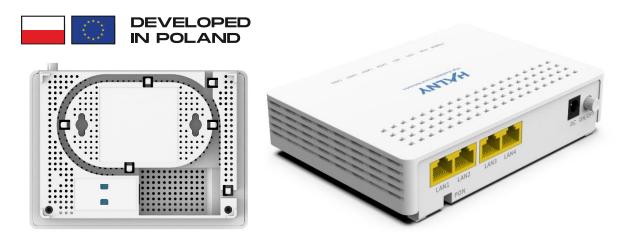

All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.





Hardware Specification

Flash / RAM 128MB / 256MB CPU Dual Core 1GHz

GPON B+ SC/APC **WAN Port**

2.488Gbps Downstream 1.244Gbps Upstream

GPON Tx $0.5 \sim 5 dBm$

GPON Rx -10 ~ -27 dBm

LAN Ports 4 x 10/100/1000BASE-T

(RJ-45)

Auto-sensing, auto-detection

MDI/MDI-X

LED POWER, PON, LOS, NET

LAN1, LAN2, LAN3, LAN4

Storage Temp. -20°C~70°C (-4F~158F)

Operating Temp.

0°C~45°C (32F~113F)

Operating 5% ~ 95%

Humidity (non-condensing)

Power Supply DC +12V / 1.0A

ON/OFF Power, Reset **Buttons**

Dimension $(W \times D \times H)$ 140 x 102 x 34mm

Software Specification

GPON ITU-T G.984.x and G.988

OMCI G.984.4 / G.988 AES / FEC / DBA Dying GASP Multicast GEM

L2 802.1D Bridge

VLAN 802.1Q with 802.1p CoS

IGMP Snooping v/1v2/v3 Jumbo Frame 2K

Rate-Limit (Traffic Limitation)

Bridge filter

Roque DHCP Server filter

VLAN (SFU Mode) Advanced VLAN operation: (access, transparent, translation,

QinQ, Selective QinQ, Hybrid)

Management

WEB (two user accounts)

Remote Syslog

OMCI

L3 Router / NAT / PAT PPPoE / DHCP Client (HGU Mode)

Static IP **DHCP Server IGMP Proxy**

VPN Pass-through

UPnP

DMZ / Port Forwarding

IPv4 / IPv6 IPv6 Dual Stack IPv6 DS-Lite

IPv6 Firewall RFC-6092

Provisioning Easy-to-use provisioning

for all ONT configuration

DOCSIS like provisioning

over GPON/EPON

TR-069 **OMCI**

OTT Upgrade DHCP 66/67 XML RestAPI / JSON

All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.





Interoperability Test Result

NOKIA (Alcatel-Lucent)	Cisco/Altice
DZS	FIBERHOME
ZTE	RAISECOM
HUAWEI	ZYXEL
CALIX	ZHONE
ADTRAN	ISKRATEL

Ordering Information

HL-4G2 / HL-4G2-EU	HALNY NETWORKS GPON ONT 4-PORT LAN 10/100/1000, B+ SC/APC, Router/Bridge, with European Power Adapter
HL-4G2-US	HALNY NETWORKS GPON ONT 4-PORT LAN 10/100/1000, B+ SC/APC, Router/Bridge, with North America Power Adapter
HL-4G2-UK	HALNY NETWORKS GPON ONT 4-PORT LAN 10/100/1000, B+ SC/APC, Router/Bridge, with United Kingdom Power Adapter
HL-4G2-NOPS	HALNY NETWORKS GPON ONT 4-PORT LAN 10/100/1000, B+ SC/APC, Router/Bridge, without Power Adapter

Please contact sales for detailed order information



All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.